

# Quality Report for Dataset NAUEQZ

Generated on 2025-05-29 at 20:59 UTC

The quality metrics that follow represent quantitative measures of the quality of the dataset.

## Metrics

Warnings Summary	2
Fried Parameter	2
Light Level	3
Noise Estimation	3
Sensitivity	4
Average Across Frame - DARK	4
Average Across Frame - LAMP_GAIN	5
Average Across Frame - SOLAR_GAIN	5
Root Mean Square (RMS) Across Frame - DARK	6
Root Mean Square (RMS) Across Frame - LAMP_GAIN	6
Root Mean Square (RMS) Across Frame - SOLAR_GAIN	7
Data Source Health	8
Frame Counts	8
Average Across Dataset	8
Dataset RMS	8
Adaptive Optics Status	9
PolCal Constant Values in Calibration Unit Fit	9
PolCal Global Calibration Unit Fit - Beam 1	9
PolCal Global Calibration Unit Fit - Beam 2	10
PolCal Local Bin Fits - Beam 1	11
PolCal Local Bin Fits - Beam 2	14
PolCal Fit Residuals - Beam 1	17
PolCal Fit Residuals - Beam 2	18
PolCal Modulation Efficiency - Beam 1	19
PolCal Modulation Efficiency - Beam 2	20

## Warnings Summary

### Data Source Health:

Data sourced from components with a health status of 'ill', 'bad', or 'unknown'.

### Frame Counts:

33.3% of frames were not used in the processing of task type DARK

### Average Across Frame - LAMP\_GAIN:

File with datetime 2025-04-14T23:40:05.767039 has a value considered to be an outlier for this metric

### Average Across Frame - SOLAR\_GAIN:

File with datetime 2025-04-14T23:01:37.657646 has a value considered to be an outlier for this metric


### Root Mean Square (RMS) Across Frame - LAMP\_GAIN:

File with datetime 2025-04-14T23:40:01.684017 has a value considered to be an outlier for this metric

## Fried Parameter

This metric quantifies the stability of the atmosphere during an observation and directly impacts the data quality through a phenomenon known as atmospheric seeing. One measurement is taken per L1 frame. Only measurements taken while the AO system is locked are valid.


**Average valid Fried Parameter measurements for L1 dataset:  $0.06 \pm 0.02$  m**

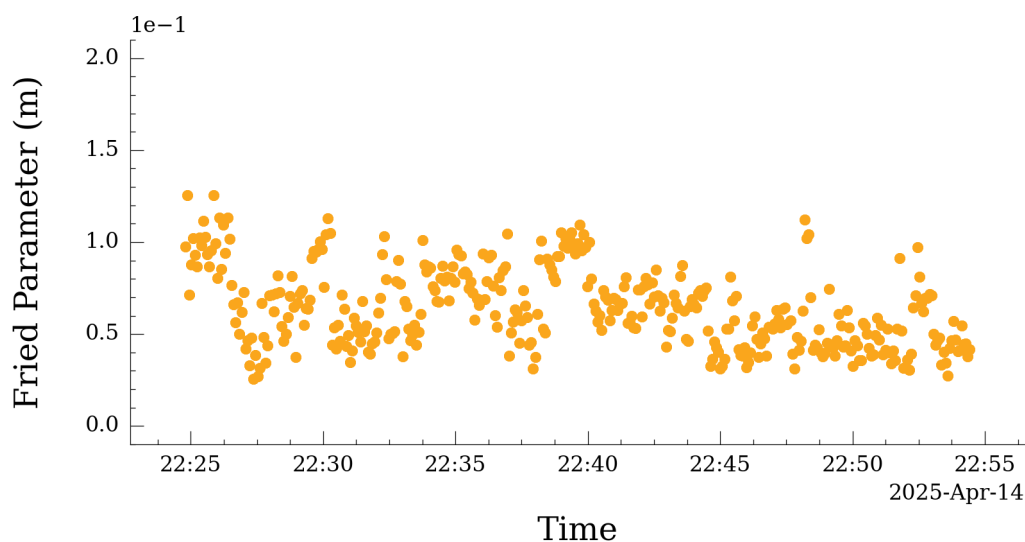

## Light Level


The telescope light level, as measured by the Telescope Acquisition Camera, at the start of data acquisition of each frame.

**Average Light Level for L1 dataset:  $642.87 \pm 3.6$  adu**

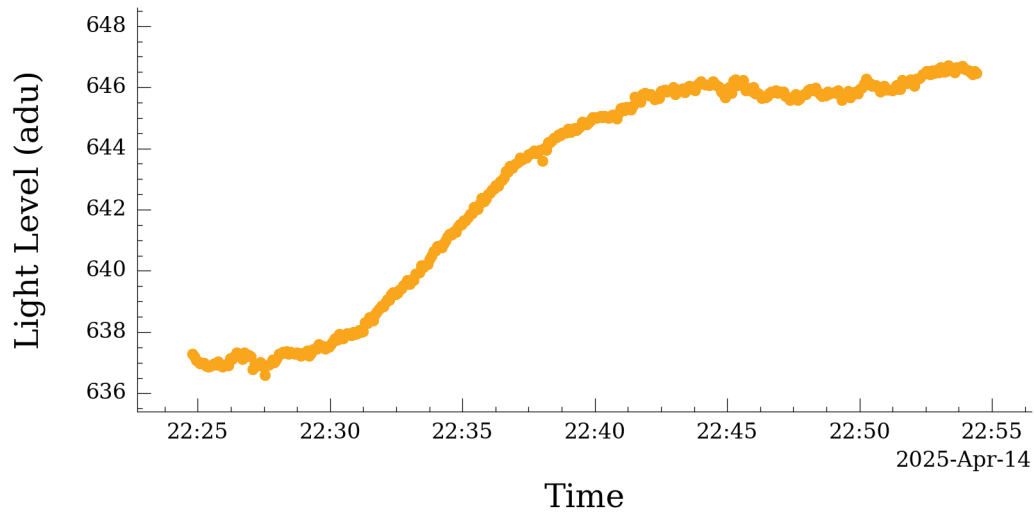


## Noise Estimation

Estimate of the noise in L1 frames. Noise is computed as the average of the stddev of boxes/cubes that extend 1/5 from the edge of the images on all sides. One measurement taken per L1 frame.

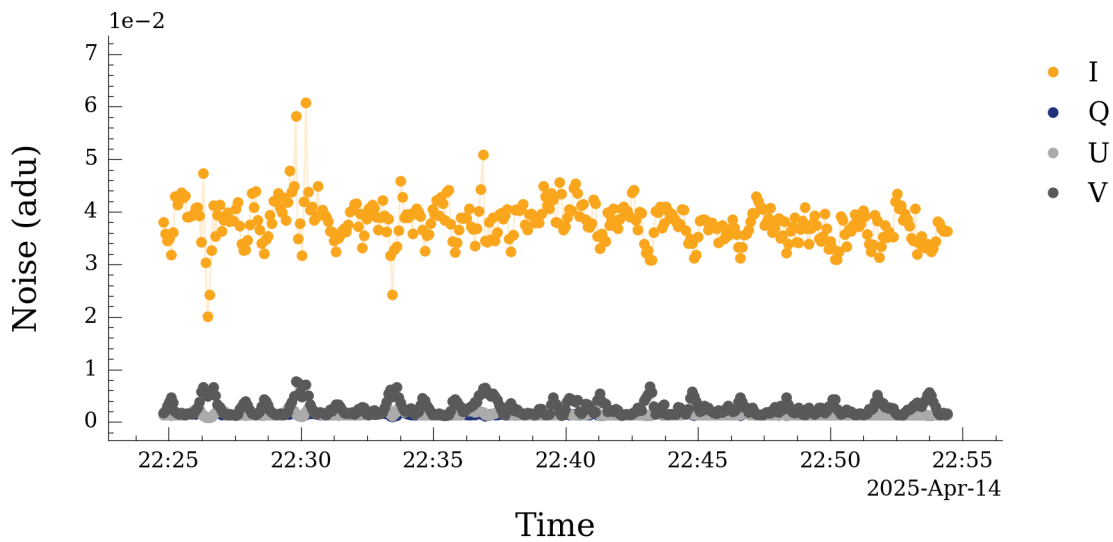


## Sensitivity

Sensitivity is defined as the stddev of a particular Stokes parameter divided by the signal in Stokes I (computed as a median over the whole frame). One measurement is shown per map scan.

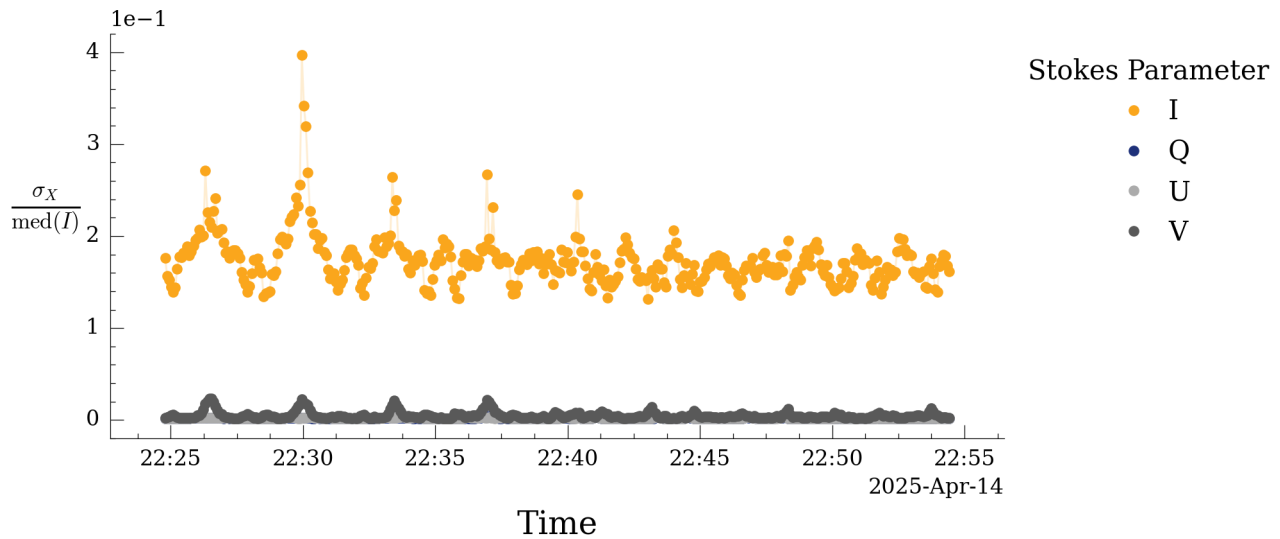


## Average Across Frame - DARK

Average intensity value across frames of task type DARK. One measurement is taken per frame in each task type.

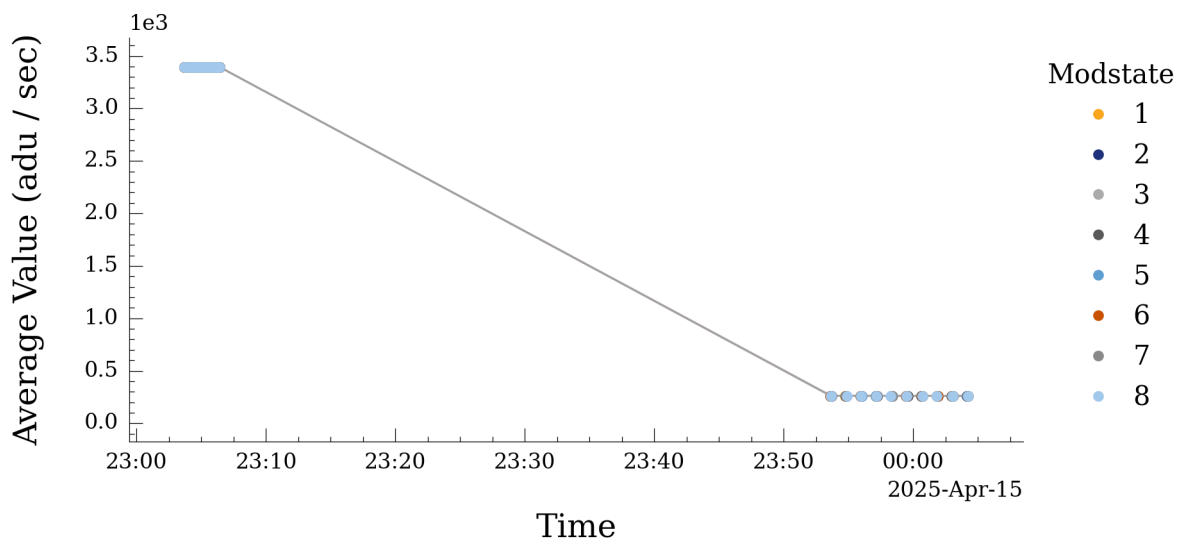

## Average Across Frame - LAMP\_GAIN


Average intensity value across frames of task type LAMP\_GAIN. One measurement is taken per frame in each task type.

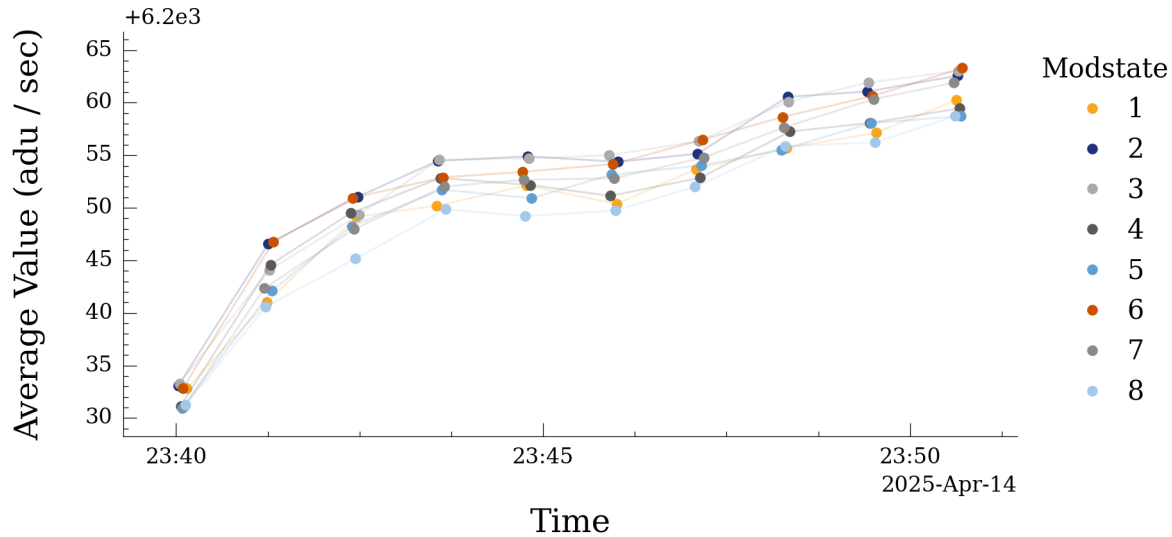

File with datetime 2025-04-14T23:40:05.767039 has a value considered to be an outlier for this metric

## Average Across Frame - SOLAR\_GAIN


Average intensity value across frames of task type SOLAR\_GAIN. One measurement is taken per frame in each task type.

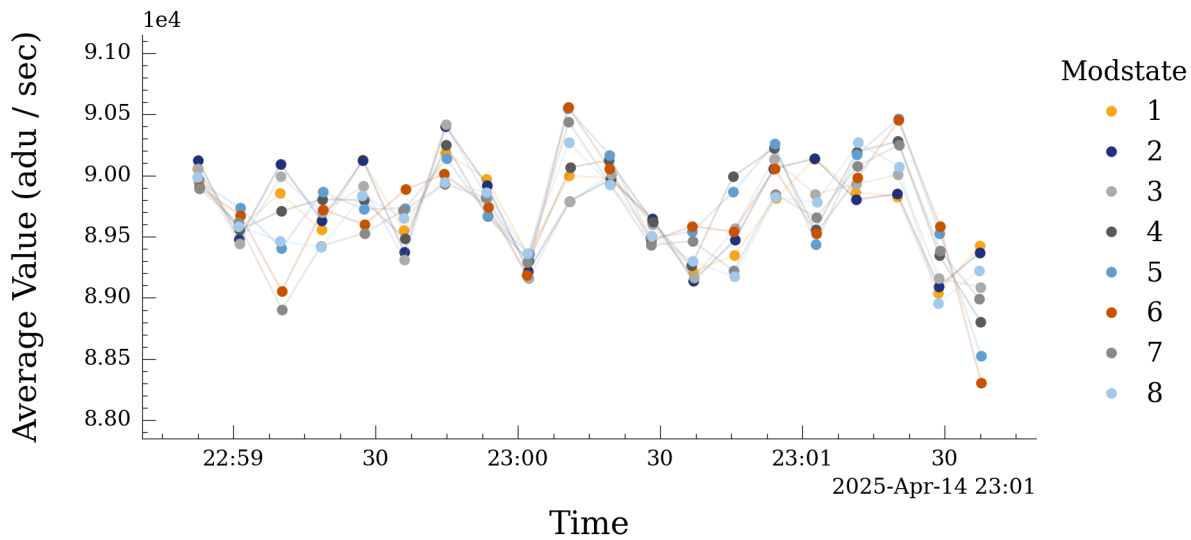

File with datetime 2025-04-14T23:01:37.657646 has a value considered to be an outlier for this metric


## Root Mean Square (RMS) Across Frame - DARK

RMS value across frames of task type DARK. One measurement is taken per frame in each task type.

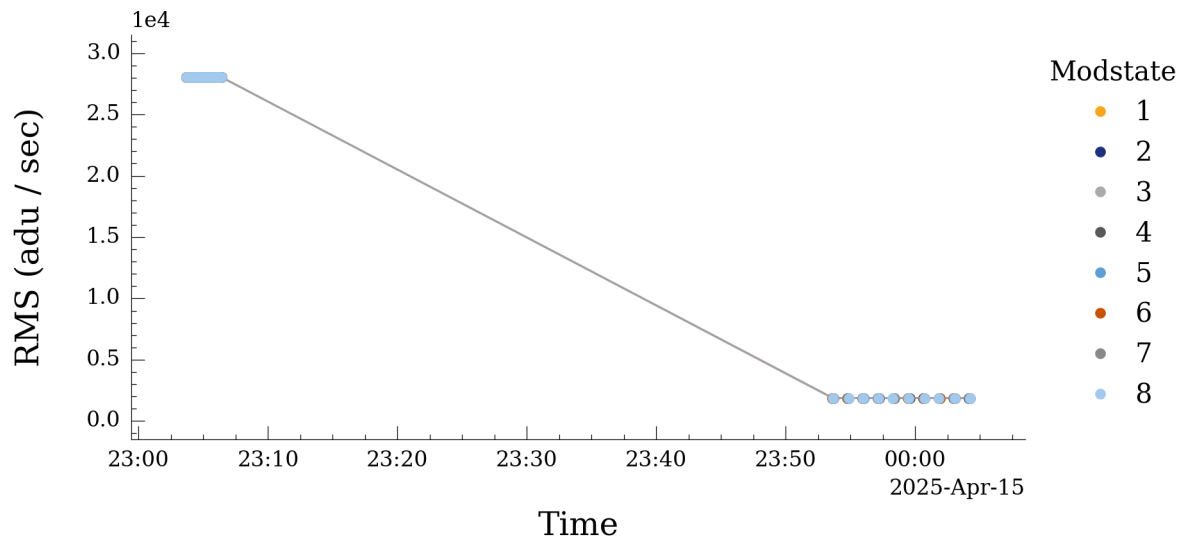

## Root Mean Square (RMS) Across Frame - LAMP\_GAIN


RMS value across frames of task type LAMP\_GAIN. One measurement is taken per frame in each task type.

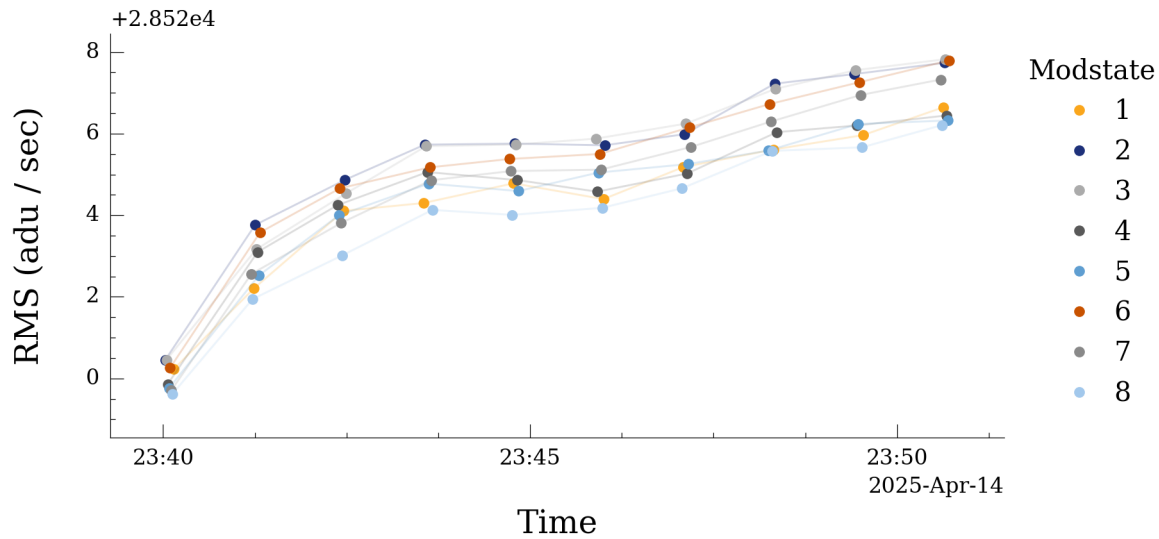

File with datetime 2025-04-14T23:40:01.684017 has a value considered to be an outlier for this metric

## Root Mean Square (RMS) Across Frame - SOLAR\_GAIN

RMS value across frames of task type SOLAR\_GAIN. One measurement is taken per frame in each task type.

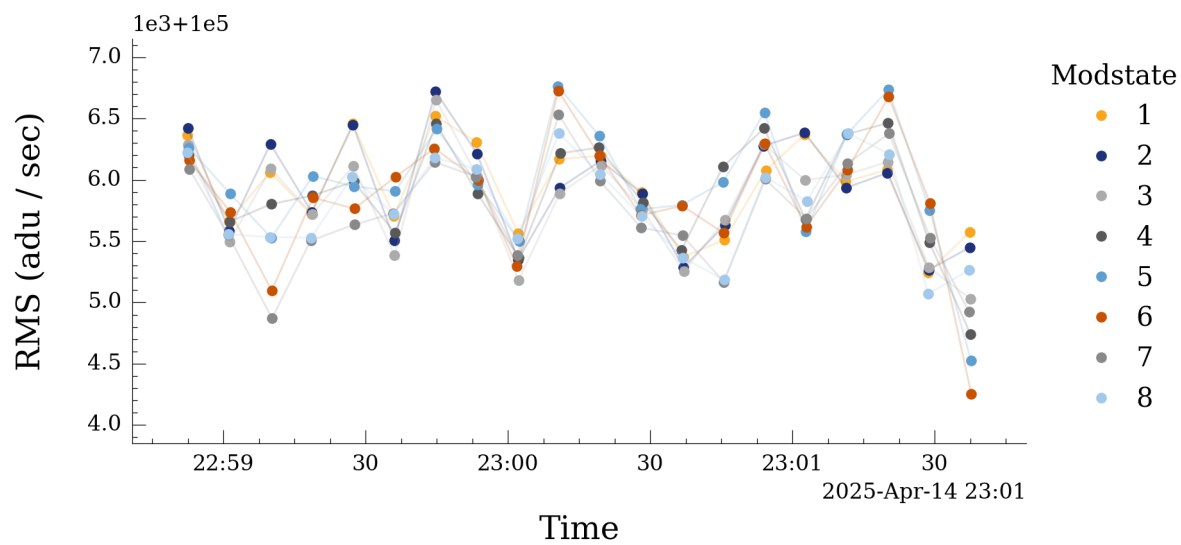

## Data Source Health

This metric contains the worst health status of the data source during data acquisition. One reading is taken per L1 frame.

Status	Count
unknown	1564

Data sourced from components with a health status of 'ill', 'bad', or 'unknown'.

## Frame Counts

This metric is a count of the number of frames used to produce a calibrated L1 dataset

Task Type	Total Frames	Unused Frames
OBSERVE	3168	0
LAMP_GAIN	80	0
GEOMETRIC	160	0
DARK	240	80
POLCAL	1152	0
SOLAR_GAIN	160	0

33.3% of frames were not used in the processing of task type DARK

## Average Across Dataset

This metric is the calculated mean intensity value across data from an instrument program task type used in the creation of an entire L1 dataset.

Task Type	Dataset Average (adu / sec)
SOLAR_GAIN	89712.23
LAMP_GAIN	6251.42
DARK	2350.16

## Dataset RMS

This metric is the calculated root mean square intensity value across data from an instrument program task type used in the creation of an entire L1 dataset.

Task Type	Dataset RMS (adu / sec)
LAMP_GAIN	28524.76
DARK	19312.18
SOLAR_GAIN	105864.62



## Adaptive Optics Status

This metric shows the percentage of frames in which the adaptive optics system was running and locked

**The adaptive optics system was running and locked for 99.7% of the observed frames**

## PolCal Constant Values in Calibration Unit Fit

These values are important aspects of the polcal model, but are held constant during Calibration Unit fits.  $p_y$  is the "transmission leakage" of the polarizer (see Appendix D of Harrington et al. 2021 for more information). The (x, t) pairs parameterize mirror Mueller matrices for three mirror groups; M12, M34, and M56.

Parameter	Value used during fit
polarizer $p_y$	0.010566
x12	1.006634
t12	-0.004514
x34	0.997536
t34	-0.073770
x56	1.001032
t56	-0.006143

## PolCal Global Calibration Unit Fit - Beam 1

The deviation from database metrology values for Calibration Unit parameters used to compute demodulation matrices. These parameters are fit the same across all polcal bins.

Parameter	Free in Fit?	Init Value	Best Fit Value	Difference	Relative Diff.
Q_in	False	0.00	0.00	0.00e+00	-
U_in	False	0.00	0.00	0.00e+00	-
V_in	False	0.00	0.00	0.00e+00	-
ret045 [deg]	True	12.01	11.01	1.00e+00	8.36e-02
ret0h [deg]	True	-46.88	-47.22	3.41e-01	-7.27e-03
ret0r [deg]	True	0.08	0.04	3.31e-02	4.41e-01
t_pol [%]	False	90.95	90.95	0.00e+00	0.00e+00
t_ret [%]	False	97.17	97.17	0.00e+00	0.00e+00


## PolCal Global Calibration Unit Fit - Beam 2



The deviation from database metrology values for Calibration Unit parameters used to compute demodulation matrices. These parameters are fit the same across all polcal bins.



Parameter	Free in Fit?	Init Value	Best Fit Value	Difference	Relative Diff.
Q_in	False	0.00	0.00	0.00e+00	-
U_in	False	0.00	0.00	0.00e+00	-
V_in	False	0.00	0.00	0.00e+00	-
ret045 [deg]	True	12.01	11.06	9.49e-01	7.91e-02
ret0h [deg]	True	-46.88	-47.25	3.78e-01	-8.06e-03
ret0r [deg]	True	0.08	0.09	-1.19e-02	1.58e-01
t_pol [%]	False	90.95	90.95	0.00e+00	0.00e+00
t_ret [%]	False	97.17	97.17	0.00e+00	0.00e+00

## PolCal Local Bin Fits - Beam 1

The first plot shows histograms of the individual modulation matrix elements. Data show 100 uniformly sampled points from 10866 total points spanning 10866 spatial bins.

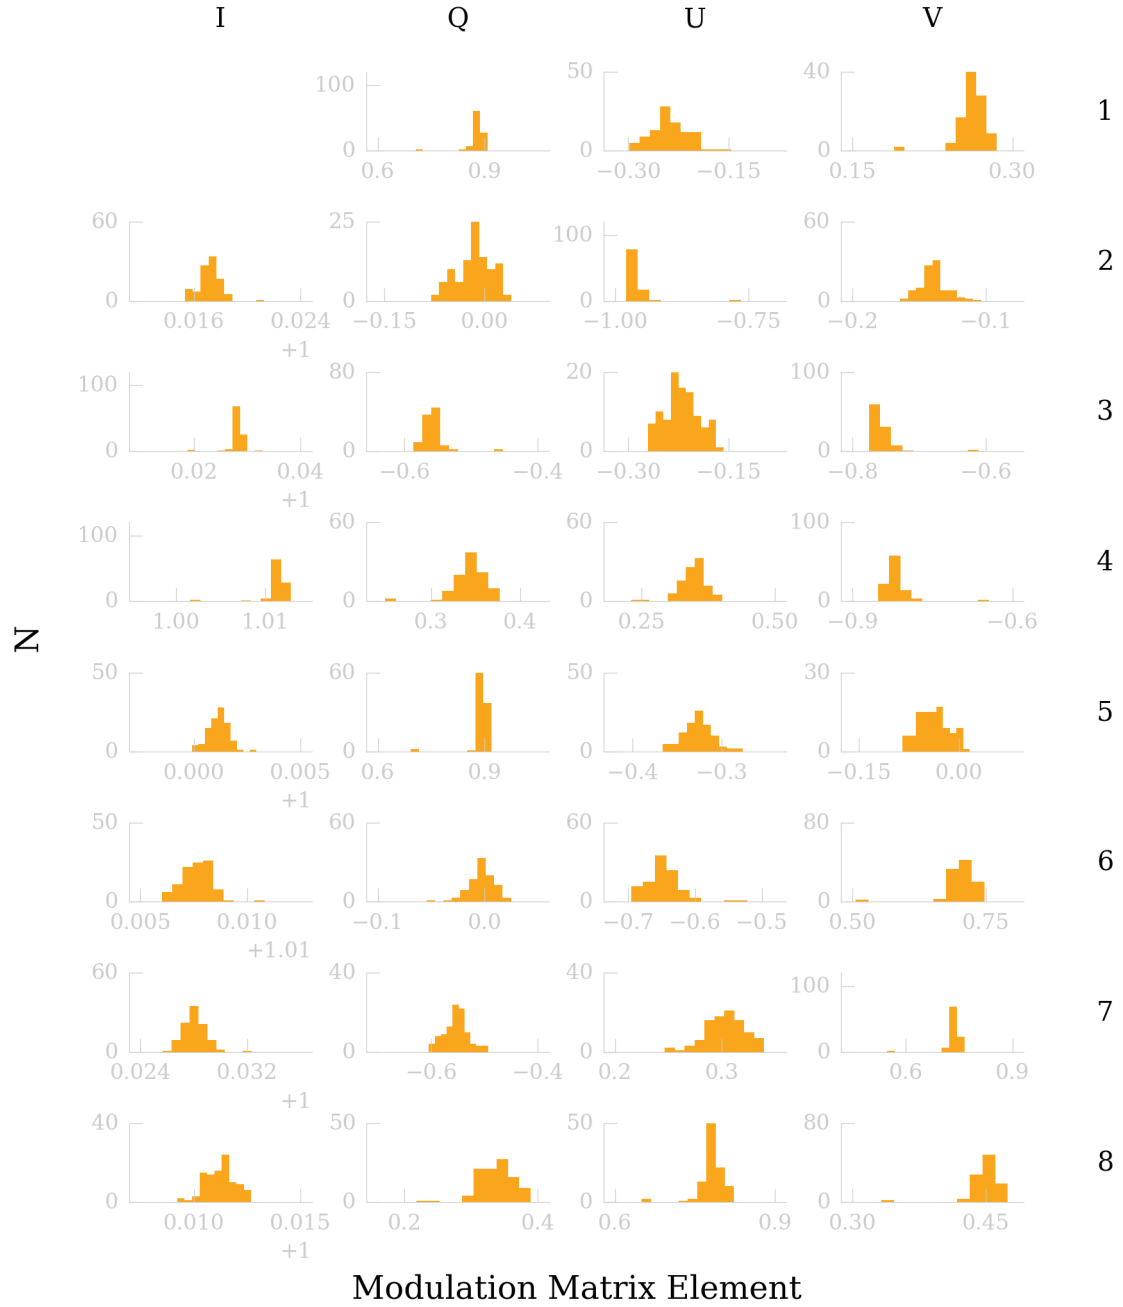


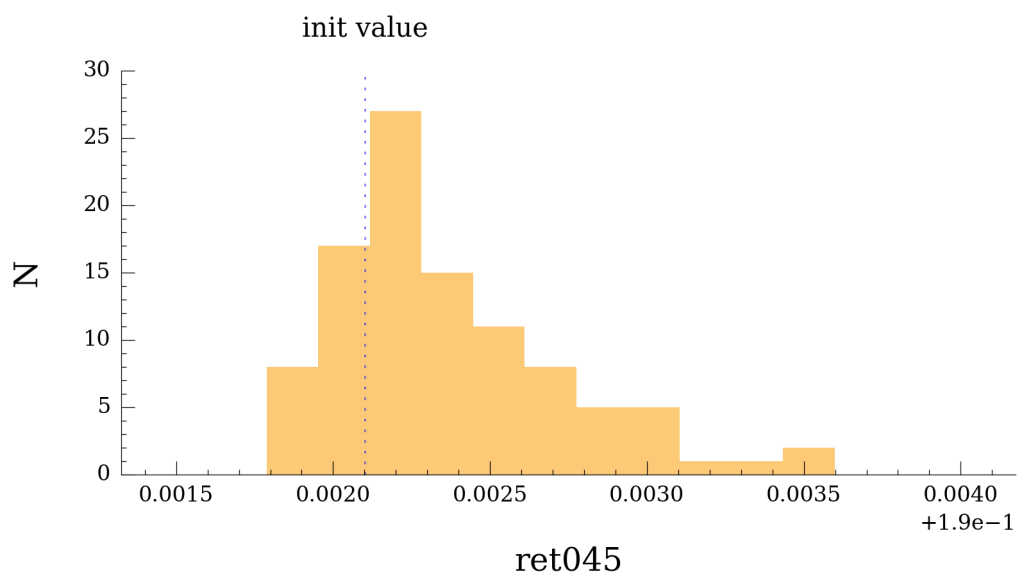
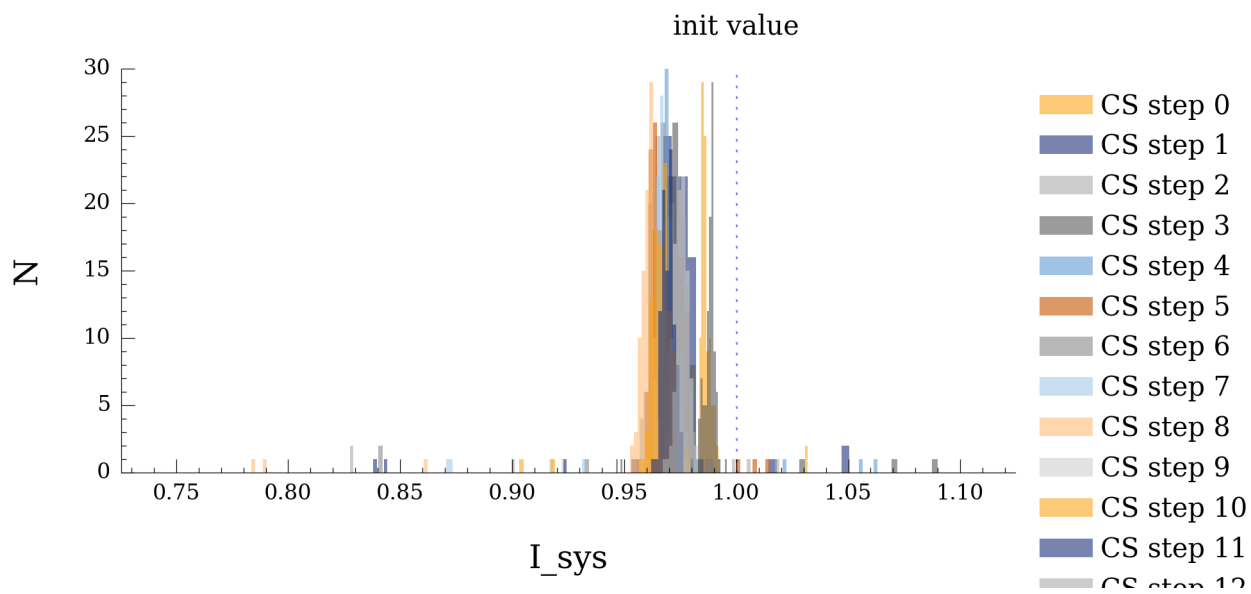


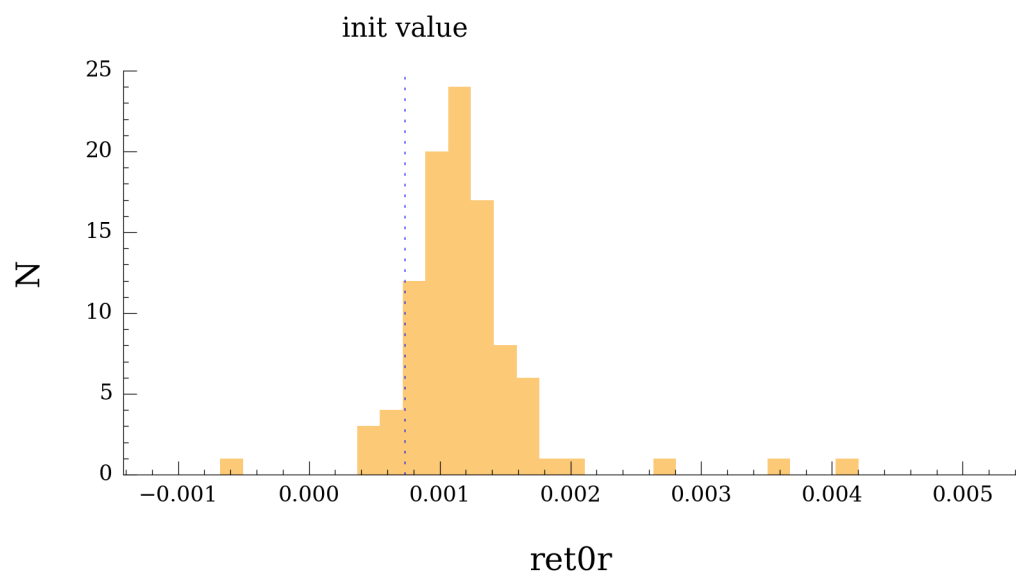
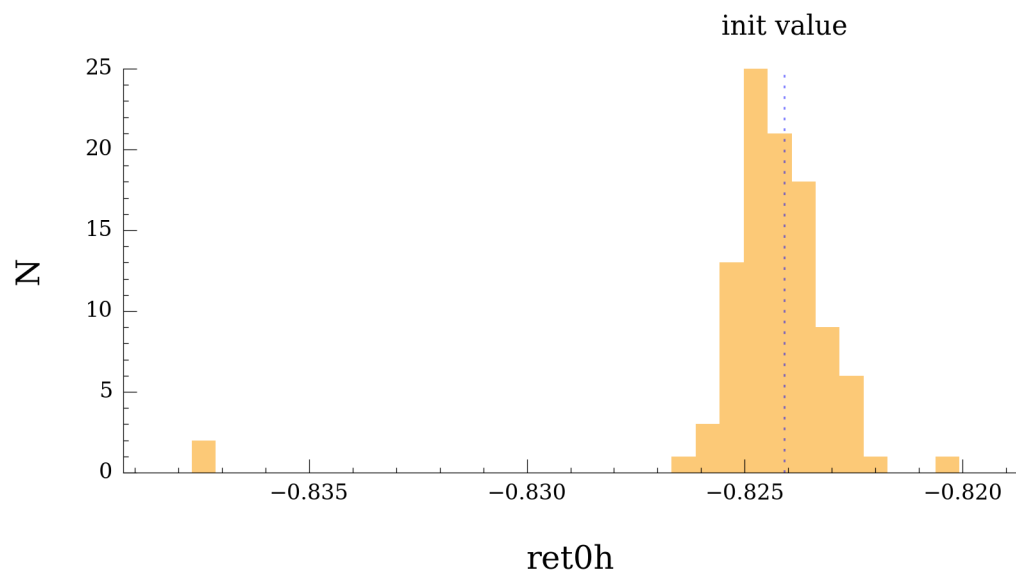


## PolCal Local Bin Fits - Beam 2

The first plot shows histograms of the individual modulation matrix elements. Data show 100 uniformly sampled points from 10866 total points spanning 10866 spatial bins.

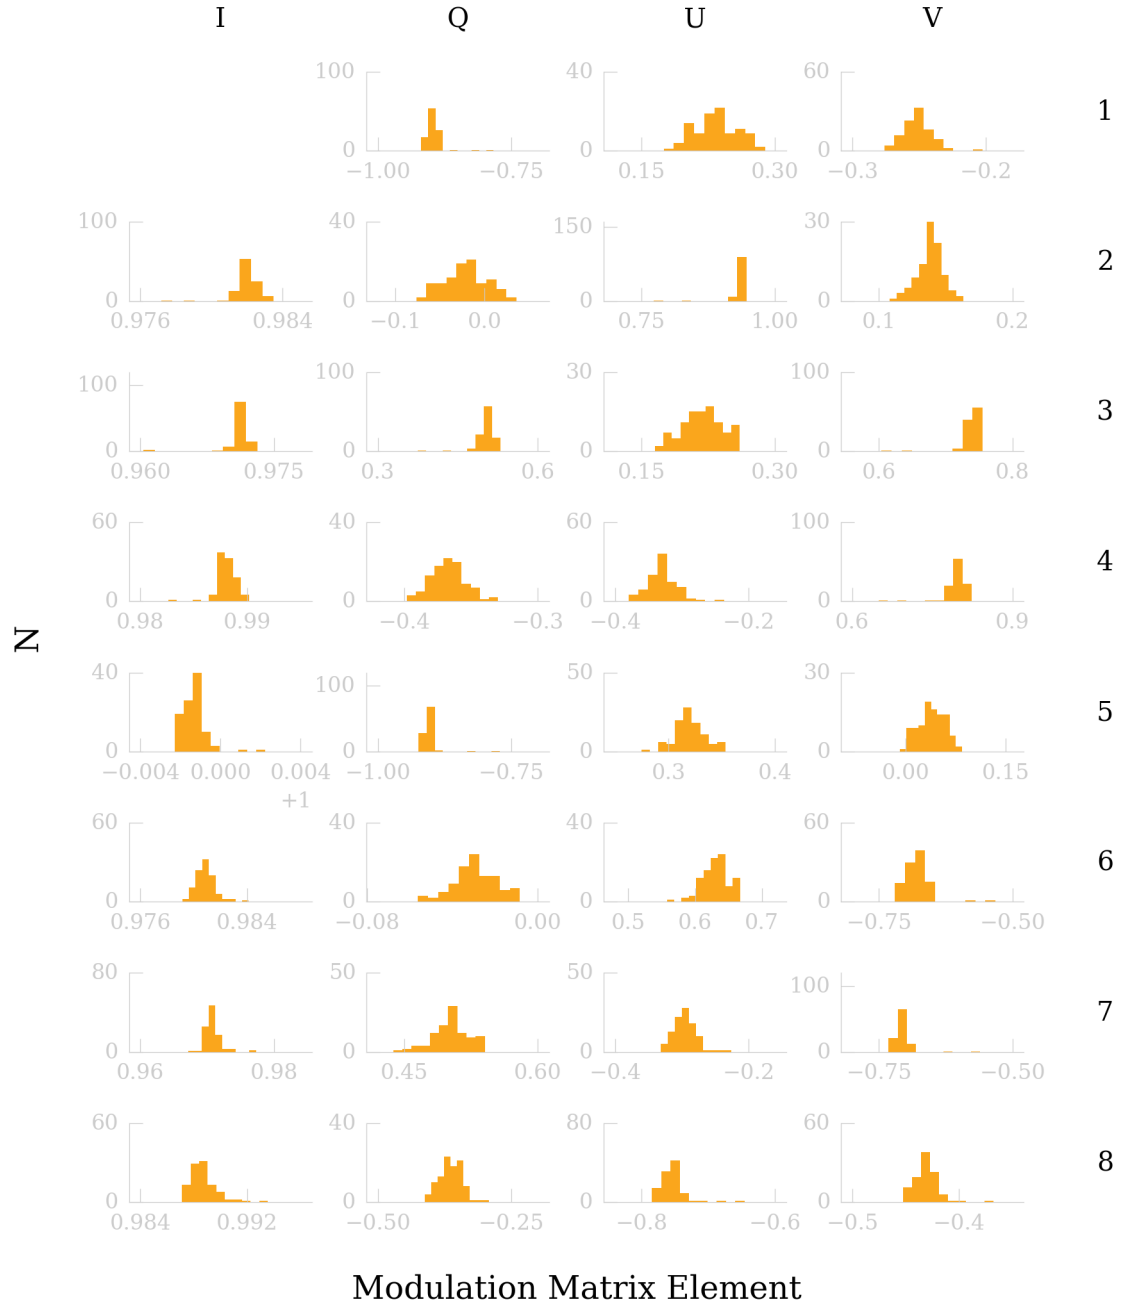

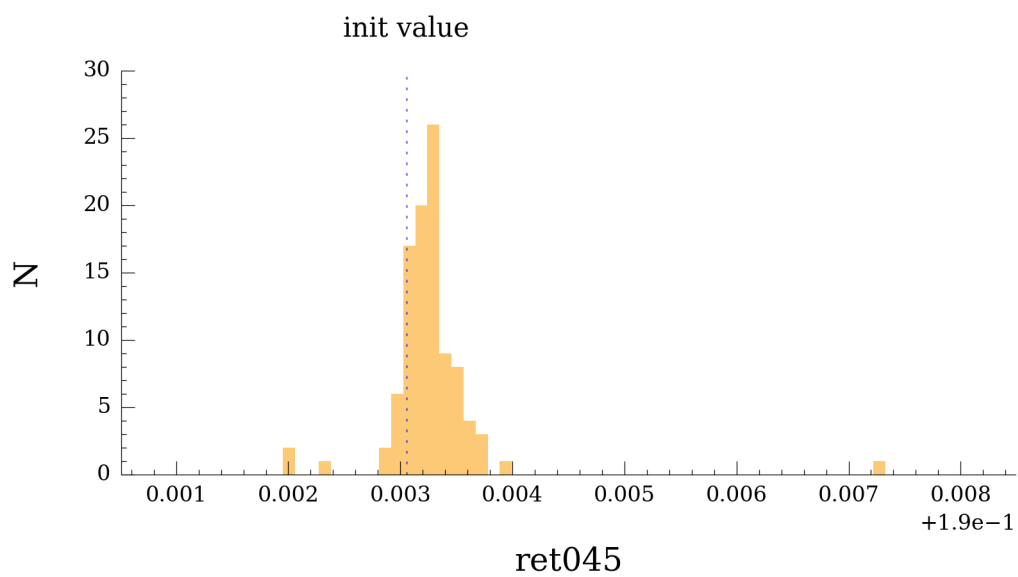
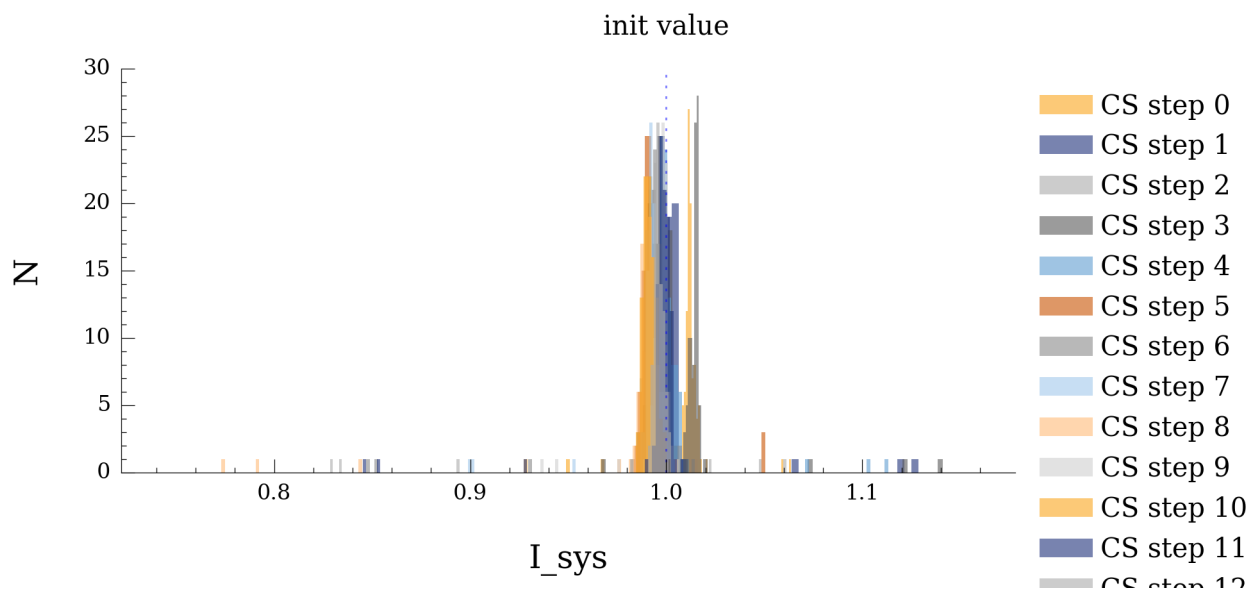


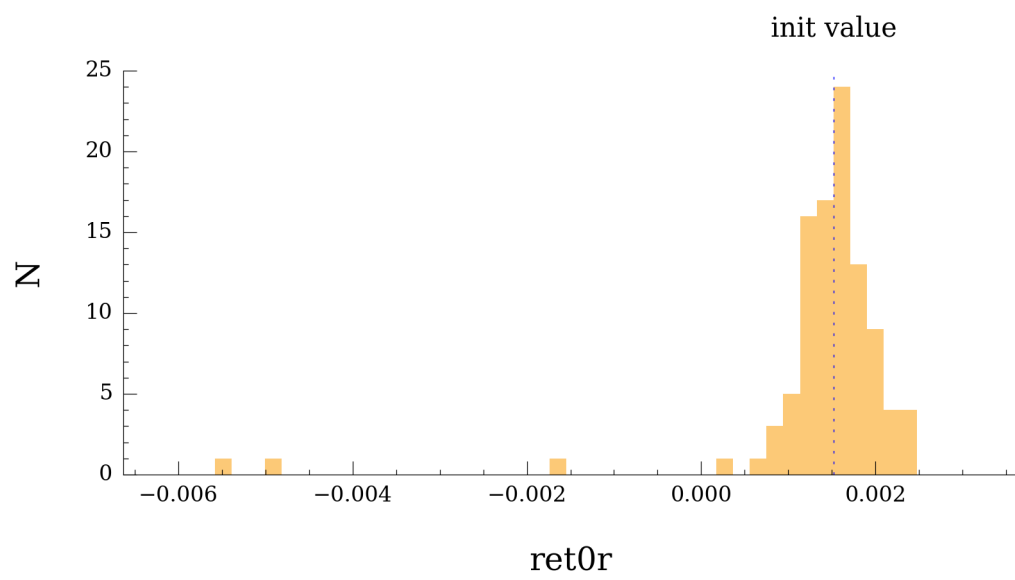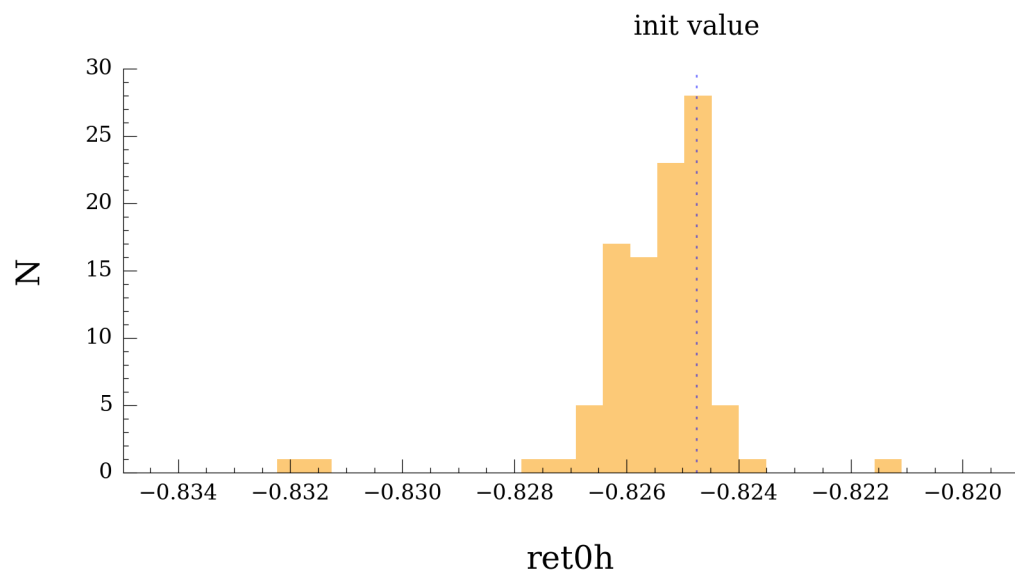





## PolCal Fit Residuals - Beam 1

The top plot shows relative flux residual distributions for all polcal Calibration Sequence steps. The bottom plot shows the reduced chi-squared distribution of all fits. Data show 100 uniformly sampled points from 10866 total points spanning 10866 spatial bins.

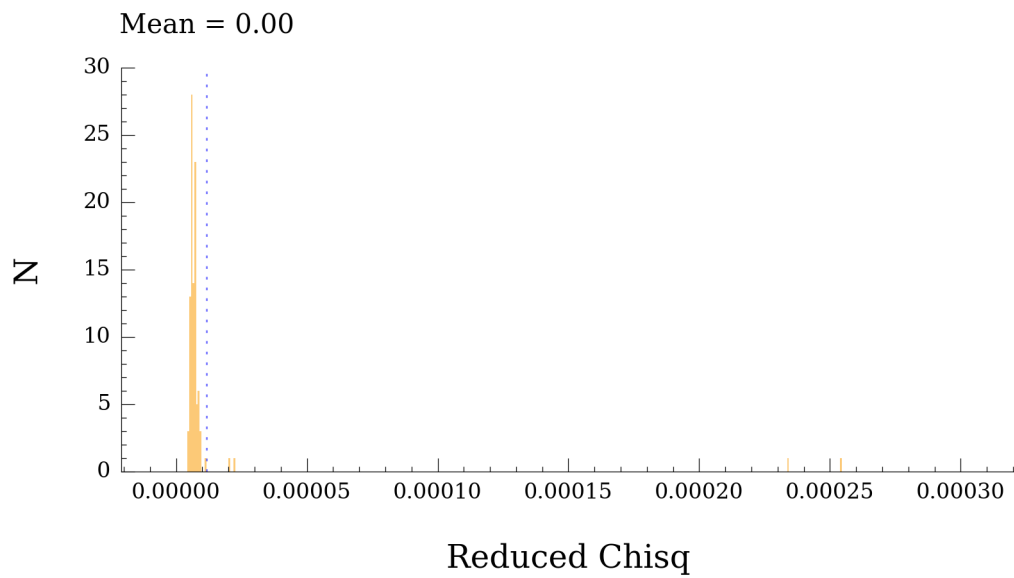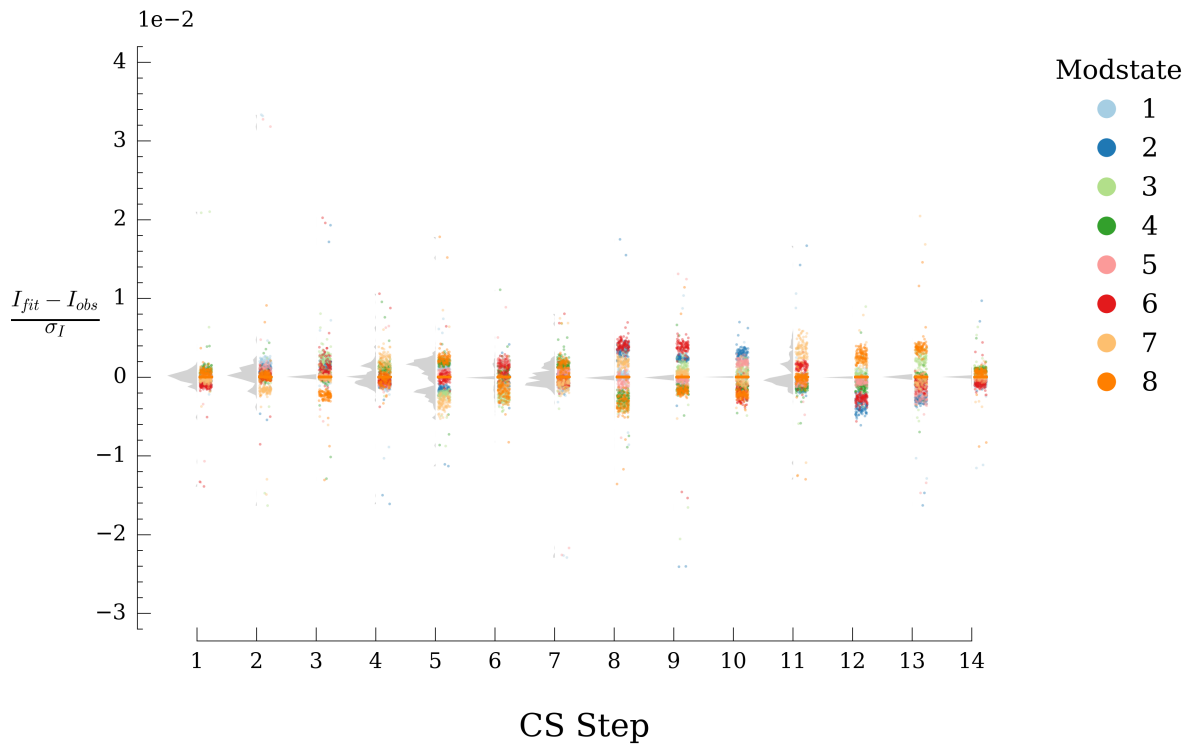


## PolCal Fit Residuals - Beam 2

The top plot shows relative flux residual distributions for all polcal Calibration Sequence steps. The bottom plot shows the reduced chi-squared distribution of all fits. Data show 100 uniformly sampled points from 10866 total points spanning 10866 spatial bins.

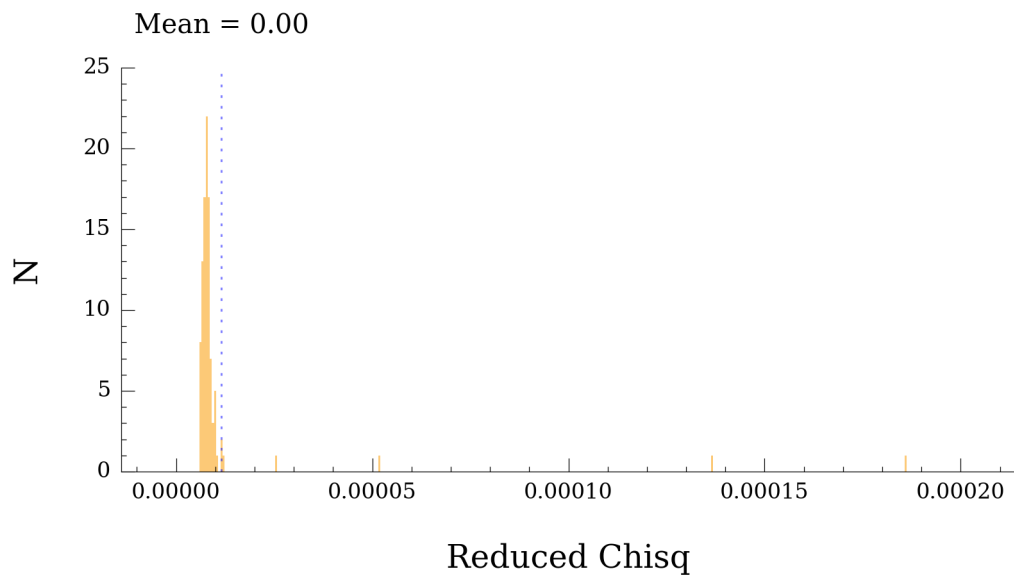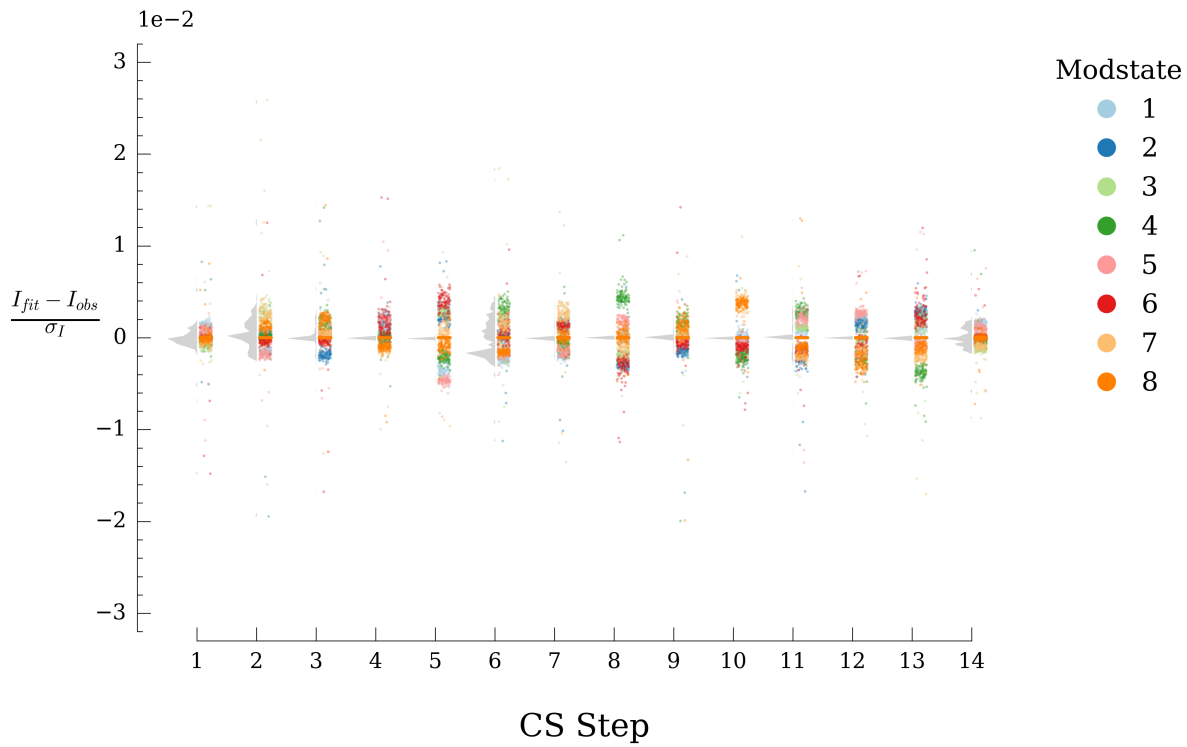

## PolCal Modulation Efficiency - Beam 1

The modulation efficiencies for all fit modulation matrices. Data show 100 uniformly sampled points from 10866 total points spanning 10866 spatial bins.

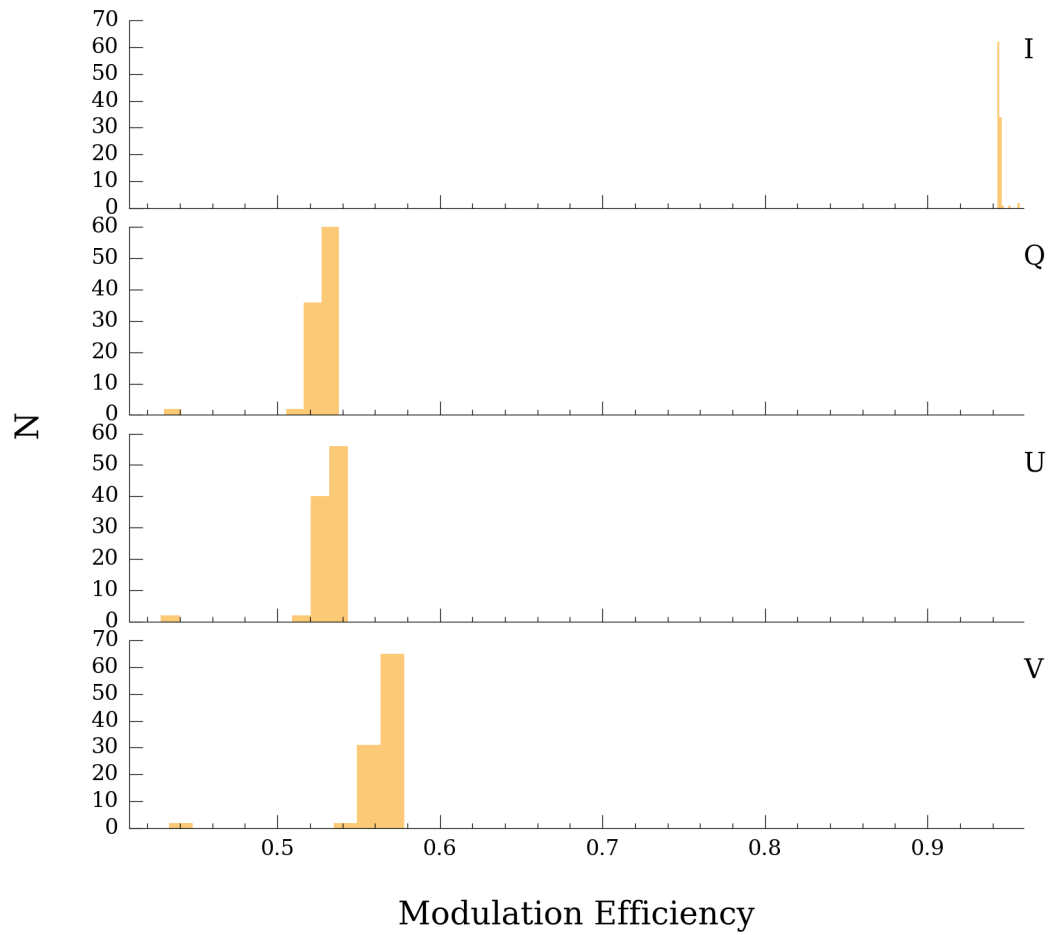

## PolCal Modulation Efficiency - Beam 2

The modulation efficiencies for all fit modulation matrices. Data show 100 uniformly sampled points from 10866 total points spanning 10866 spatial bins.

